

F129 Design

Programmable HD heating panel



COMFORT

- Easy prog: program your device 24h/7, according to your life rhythm for greater comfort & savings
- Fast heating thanks to an efficient and homogeneous heat distribution on the appliance surface
- Sheathed heating element with an aluminium diffuser (safe, silent and long-lasting)
- Class II and IP 24 protection with dual electric insulation for ultimate safety
- Automatic over-heating safety device and anti-tilt system

SAVINGS

- Up to 25% energy savings*
- High-precision electronic thermostat
- Ergonomic LCD digital controls
- ErP-ready






USER-FRIENDLINESS

- Digital LCD ergonomic control panel
- 2 modes: Manual/Prog
- Easy to install: H-shaped vertical support
- Mobile with standing kit and plug (optional)

DESIGN


- High-end HD heating panel design
- Stamped front air outlet
- Colour: white (RAL 9016)




 <p>A B C</p> <p>Model available**</p>	<p>ACTIVE HEAT CONVECTOR 500 TO 2000 W</p> <p>Output</p>	 <p>UP TO +25% ENERGY SAVINGS*</p> <p>Energy savings</p>
 <p>LCD digital controls</p>	 <p>Technology</p>	 <p>Heating element type</p>

* Compared with a mechanical convector

** Model types: A: Horizontal / B: Vertical / C: Plinth

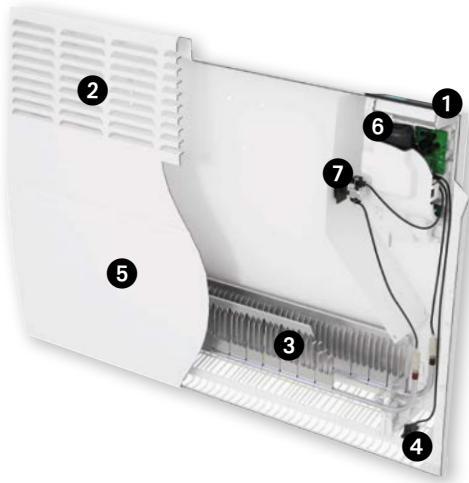

- 1 LCD digital controls
- 2 Air outlet
- 3 Sheathed heating element with aluminium diffuser
- 4 Room temperature sensor
- 5 HD front panel
- 6 Anti-tilt system
- 7 Over-heating safety device

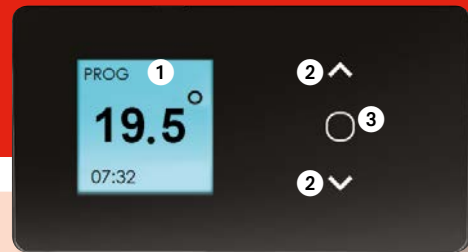

- 1 Temperature and active mode display - 2 modes: Manual/Prog
- 2 Navigation buttons
- 3 Access to menu/validation





EASY PROG

- **Manual mode:** allows to set-up the device at the desired temperature from OFF to 30°C.
- **Prog mode:** allows to set up to 3 periods of Comfort temperature by day (24h) over 7 days. Possibility to copy a daily programme on other days of the week.

HD
Technology
2 in 1


HD TECHNOLOGY

HD panel's surface heat combined with convection heat for a quick rise in temperature and homogeneous feeling of warmth:



HD heating panel heat diffusion compared with a classic convector

INSTALLATION DIMENSIONS (in mm)

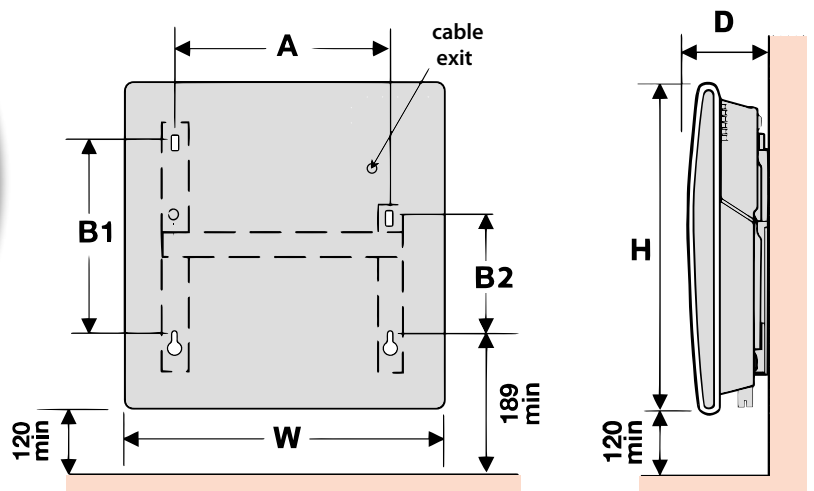

F129 DESIGN

TECHNICAL DATA

OUTPUT (W)	DIMENSIONS (mm)						NET WEIGHT (kg)
	Width (W)	Height (H)	Depth (D)	A	B1	B2	
500	391	461	114	122	256	158	3.1
1000	465	461	114	196	256	158	3.7
1500	613	461	114	344	256	158	4.6
2000	761	461	114	492	256	158	5.5