

Solius/Solius ecodomo

Extensive heating surface with integrated presence sensor
for energy savings



Product

COMFORT

- Extensive-heat panel with black painted extruded aluminium heating element & digital display
- Extruded aluminium heating element with wide radiating surface area
- Front electric air outlet

SAVINGS

- Up to 30% energy savings* thanks to integrated presence detector for the Solius ecodomo version
- Models starting at 300 W for low-energy consumption homes
- Presence /absence detection functions⁽¹⁾
- Consumption indicator for responsible, informed use of the equipment⁽¹⁾
- Control with multi-tariff digital thermostat⁽²⁾
- 6-command pilot wire: Comfort, Comfort - 1 °C, Comfort - 2 °C, Eco, Frost-free, Off
- Mode switch: Comfort, Eco, Frost-free, Off, Programme

USER-FRIENDLINESS

- Control locking device
- ASP (Anti-Staining Process) to reduce staining on wall and on equipment

DESIGN

- Light indicator for heating
- Colour shade: white (RAL 9016)



Solius Ecodomo



Solius

EASY TO INSTALL

 A B C D Model available**	EXTENSIVE HEAT PANEL HEATER 300 TO 2 000 W Output	UP TO +30% ENERGY SAVINGS⁽¹⁾ UP TO +15% ENERGY SAVINGS⁽²⁾ Energy saving
 Controls	ecodomo Technology	ALUMINIUM HEATING ELEMENT Heating element type

* Compared to a mechanical convector

** Model types : A : Vertical wall mounted / B : Horizontal wall mounted /
C : Vertical Floor standing / D : Plinth

(1) For Solius Ecodomo only - (2) For Solius only



- 1 Digital controls
- 2 Over-heating safety device
- 3 Perforated frontal air outlet
- 4 Extruded aluminium heating element
- 5 Room temperature sensor
- 6 Anti fall-down system




- 1 Display
- 2 Anti-frost mode
- 3 Economy mode
- 4 Comfort mode
- 5 Programming
- 6 Heating light indicator
- 7 Temperature settings
- 8 ON-OFF Timer

Presence /absence
detection functions
Combined with
Window open/closed detection
=

UP TO
+30%
ENERGY
SAVINGS*

INSTALLATION DIMENSIONS (in mm)

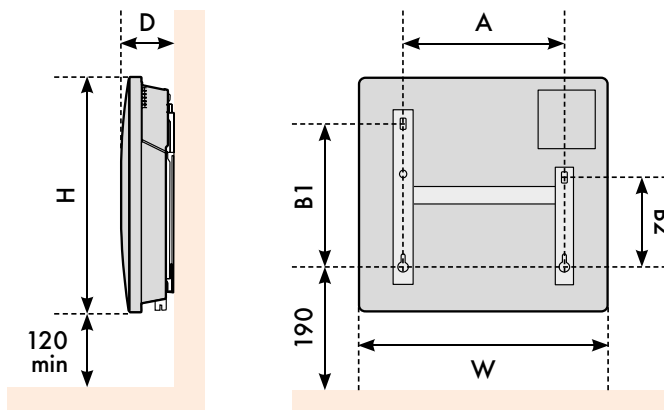

SOLIUS

TECHNICAL DATA

OUTPUT (W)	DIMENSIONS (mm)						NET WEIGHT (kg)
	Width (W)	Height (H)	Depth (D)	A	B1	B2	
Solius Ecodomo							
300	443	451	120	195	256	158	4.8
500	443	451	120	195	256	158	4.8
750	517	451	120	269	256	158	5.4
1 000	517	451	120	343	256	158	6.2
1 250	739	451	120	491	256	158	7.4
1 500	813	451	120	565	256	158	7.9
2 000	1 035	451	120	787	256	158	9.8
Solius							
750	520	450	98	269	256	158	5.3
1 000	595	450	98	343	256	158	6
1 250	740	450	98	491	256	158	7.4
1 500	815	450	98	565	256	158	8.1
2 000	1 035	450	98	787	256	158	10.2